



Aladdin Metal Products, Inc.

FACTORY ROOF CURB INSTALLATION


Installation

If the roof curb will be mounted on a new building, it can be installed as soon as the roof support members are in place. As a general rule, the curb should be placed directly on the roof support members; use tack welding (or some other suitable fastening method) to secure the roof curb in place.

Alternatively, the curb can also be mounted on a roof deck. In this instance, additional staging must be provided directly below the bottom flanges of the curb to give further support and to minimize vibration. (See figures A and B below.)

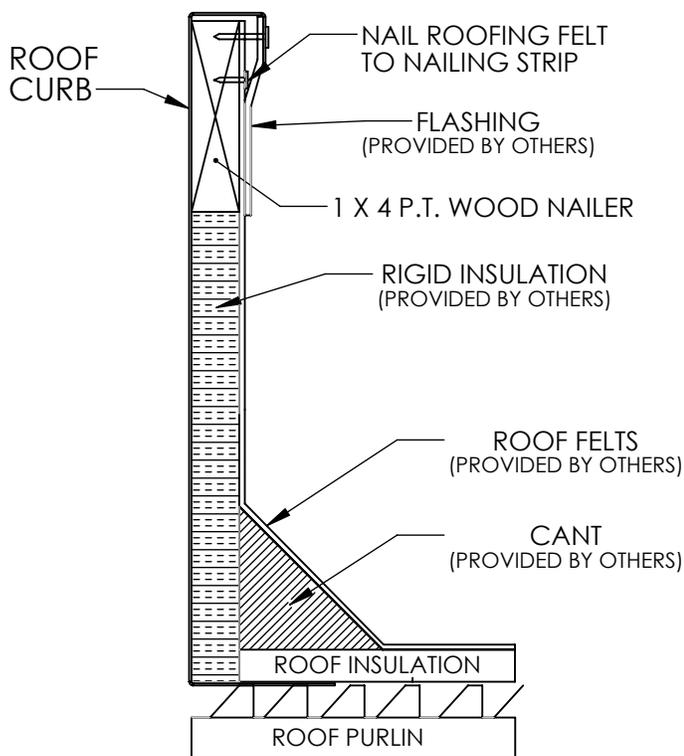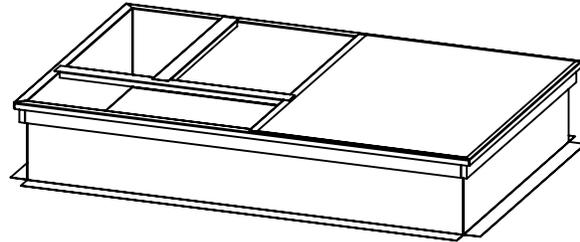

**FIGURE A - Typical Roof Curb
on New Construction**

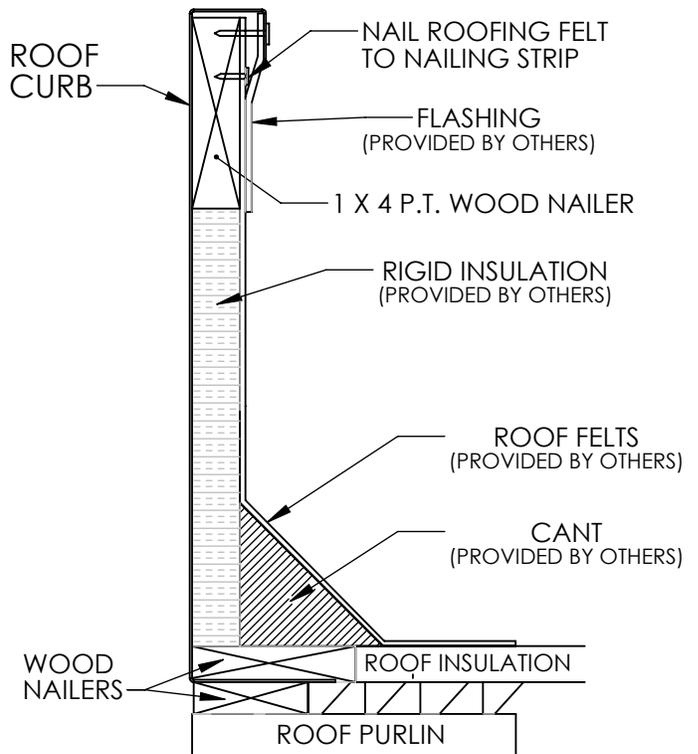

**FIGURE B - Typical Roof Curb
on Existing Construction**